

LAF CLassic A&B Removal

Time Needed: 30Min.


Parts Needed: 8615509104 Milk Valve (2x2) AB assembly.



Tools Needed: Screwdriver Torx 10, punch pliers.

Step1

- Remove the cables from the A and B valves.
- Mark the cables so that they are not mixed up when the new valve is installed.

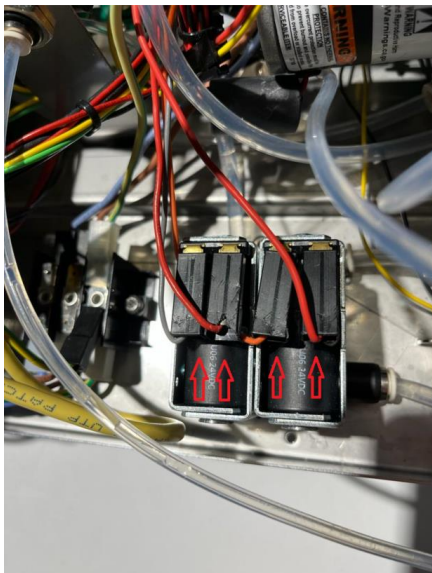

Step2

- turn the unit.
- there is 2 10 torx screws remove them.



Step3

- There are 3 hoses in the Milk Block
- Remove the 2 hoses from the A valve.
- On the B valve there is a hose that you must remove
- now you can remove the valve.

