


LAF Bar Product details

Bar Countertop Unit (Dispenser)	
Dimensions	21 x 57,8 x 31,8 cm (8.27 x 22.76 x 12.52 inches)
Weight	8.1kg (17.86 lbs)
Power	24 V connected with special cable (included)
Package Dimensions	78 x 35 x 65,6 cm (15.4 x 11 x 25.8 inches)
Dispense Speed	Up to 1.2l/min* (0.317 gal/min*) LAF Bar up to 1.6l/min* (0.423 gal/min*) LAF Bar Pro
Counterspace	Leave at least 20.1 cm (7.9 inches) free space behind machine for proper ventilation and connections cutout.

*depending on foam texture

Undercounter Unit (Milk + Refrigerator Module)	
Dimensions	22,15 x 57,05 x 52,15 cm (8.72 x 22.46 x 20.53 inches)
Weight	23.7 kg (52.25 lbs)
Power	220-230V, 50/60 Hz, 2000W, 2xSchuko plugs: 10A + 1A (120V 1x NEMA 5-15 1A + 1x NEMA 5-20 20A)
Water Supply	Water Treatment: Free from undissolved solids. Mechanical Filtration: 10 µm. Carbonate Hardness: ≤5°dKH. Connection: 3/8 female connector. Pressure: > 0.1 MPa < 1 MPa (> 14.5 PSI < 145 PSI)
Water Drainage	yes, 1x 6 mm drain tube (0.24 inches)
Package Dimensions	78 x 35 x 65.6 cm (30.7in x 13.8in x 25.8 inches)
Environment	Humidity: ≤80% relative humidity, no condensation Temperature: +5 °C to +35 °C (+41 °F to +95 °F)

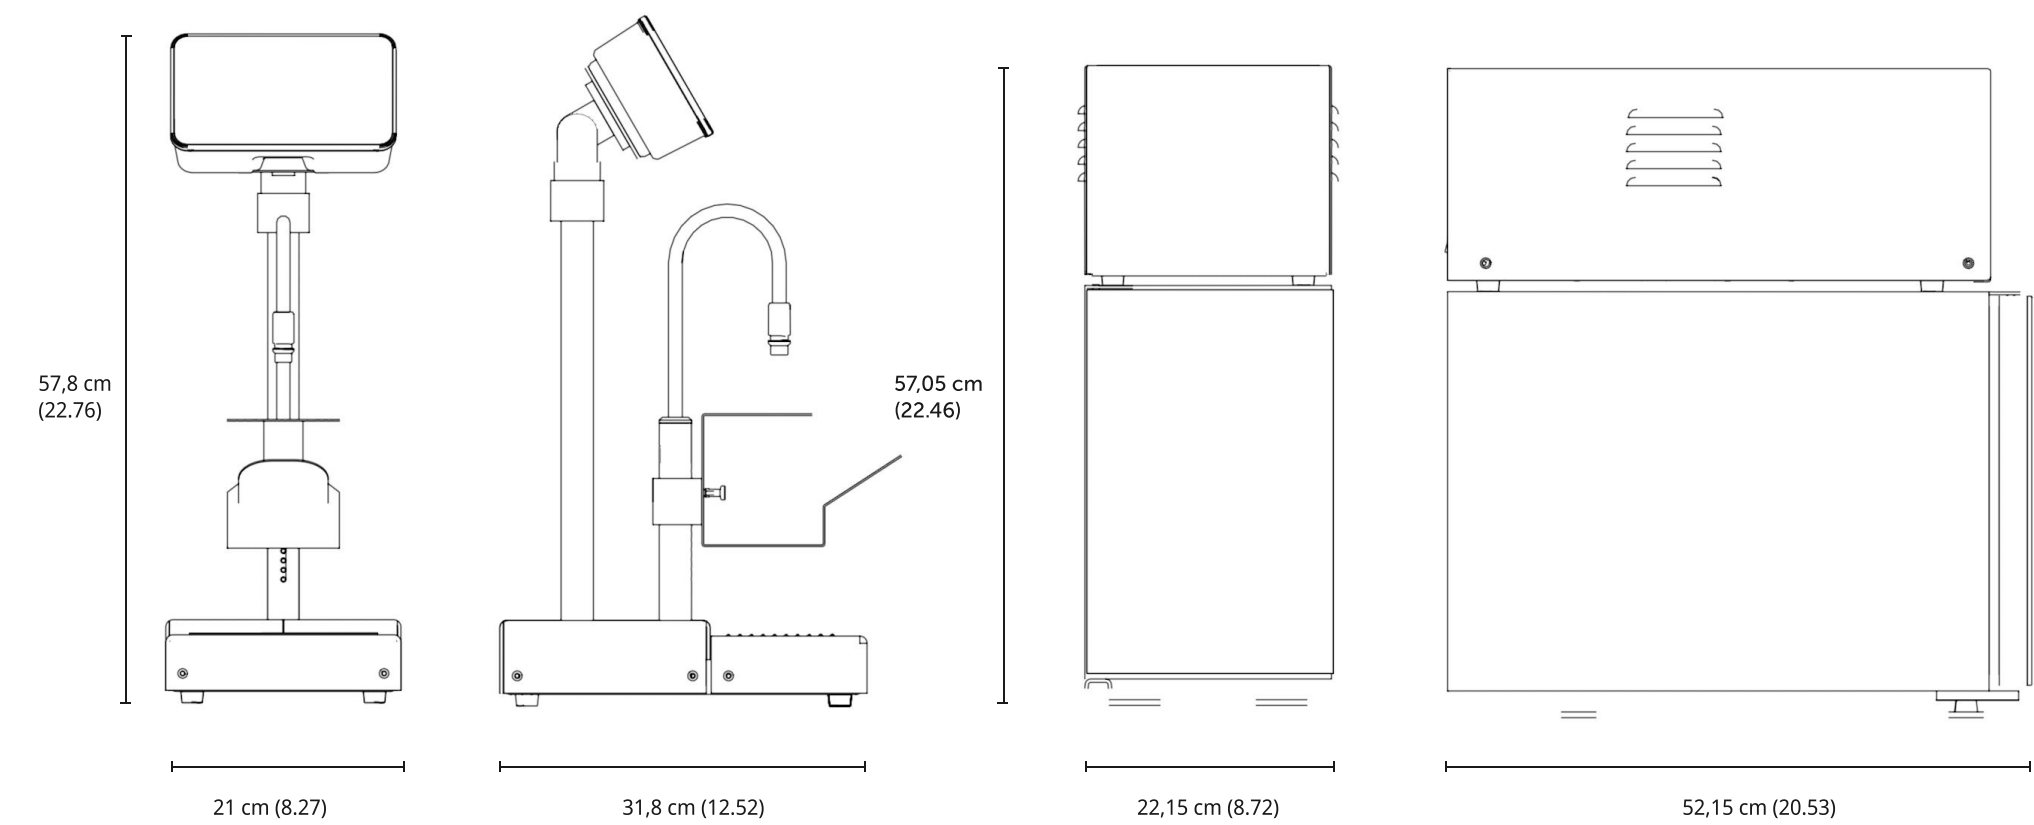

Dimensions (WxHxD): 21 x 57,8 x 31,8 cm (8.27 x 22.76 x 12.52 inches)
and 22,15 x 57,05 x 52,15 cm (8.72 x 22.46 x 20.53 inches)



LAF Bar – fridge and module under the counter



Standard fridge setup with 3.7L (1 gal) container



Extra fridge setup: 2x 3.7L (1 gal) containers



Custom setup: 3.7L (1 gal) container + custom fridge